


Close mesh matting for busy industrial areas with frequent, heavy-wheeled traffic



Wheel proof, certified slip resistant and impermeable to fluids, Firmagrip is perfect for busy industrial areas where trolleys, carts and other wheels are in frequent use

The close mesh construction provides a smooth surface for wheels to glide over while still ensuring excellent drainage for any spillages, giving you the highest slip resistance possible. Made from non-porous flexible PVC, it's resistant against chemicals, oils and acids, and easy to cut to fit on site.

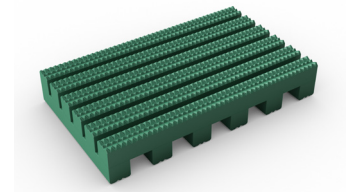

### Features:



Diamond-tread surface



Two-layer construction



Close mesh construction



Made from non-porous PVC



Comes in 10m rolls



### Benefits:



Certified slip resistant (DIN 51130:R11)



Excellent drainage (DIN 51130:V10)



Ideal for wheeled traffic



Resistant to chemicals, acids, oils



Cut to fit on site, contours to uneven surfaces



### Plastic Extruders Ltd.

Russell Gardens, Wickford  
Essex, SS11 8DN  
+44 (0) 1268 571 116

UK + USA manufactured matting products:  
[plastexmatting.com](http://plastexmatting.com)



### Standard sizes:

Product	Firmagrip
Height	14mm (9/16")
Standard roll options	10 × 0.6m (33' × 2')
	10 × 0.91m (33' × 3')
	10 × 1.22m (33' × 4')
Weight	10.5 kg/m <sup>2</sup> (2.14lbs/sq.ft)

### Tolerances:

	Height (+/- 0.5mm)	Length (0+0.3m)	Width (+/- 1cm)
Firmagrip	14mm	10m	60cm 91cm 122cm

All dimensions are nominal

### Technical information:

Acoustic	Excellent sound absorption
Chemical	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this <a href="#">information sheet</a> .
Composition	Made from flexible Polyvinyl Chloride (PVC).
Environment	Firmagrip is 100% recyclable. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Fire	EN ISO 13501 - I : 2007 - Cfl - S1
Hygiene	Made from non-porous PVC that's naturally resistant to bacteria growth.
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by <a href="#">downloading this information sheet</a> .
Slip resistance	DIN 51130:RI I,VI0
Thermal	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
UV light	Resistant to PVC degradation
Warranty	Four years. Visit our <a href="#">policies page</a> for more information about warranties

### Installation:

Firmagrip's one-piece construction means installation is simple:


- Comes in 10m rolls
- Easy to cut to fit on site
- Contours to uneven surfaces

### Cleaning:


Keeping Firmagrip looking good is easy:

- Lift or roll to clean
- Easy to clean with a high pressure hose


### Colours:



Black



Green




Red

More colours  
available  
upon request

### Ancillaries:


#### > Firmagrip

PVC edging (H: 14mm, W: 60mm)




Supplied in rolls of 10.1m (33') length with cold welding paste. Comes in black, dark grey, dark brown, holly green, Oxford blue, yellow. Size: 14mm x 60mm x 10.1m (9/16" x 2 1/2" x 33')

PVC edging (H: 14mm, W: 100mm)




Supplied in rolls of 10.1m (33') length with cold welding paste. Comes in black, dark grey and yellow. Size: 14mm x 100mm x 10.1m (9/16" x 3 3/4" x 33')

Aluminium edging (H: 15mm)




Supplied in sections of 2m (6'6") length with fixing screws and plugs. Comes in anodised aluminium and powder coated yellow. Size: 15mm x 45mm x 2m (5/8" x 1 13/16" x 6'6")

PVC snap track (H: 14mm)



Two-part snap track that can be welded together to join rolls end-to-end or side-to-side to cover large areas. Supplied with cold welding paste. Comes in black and dark grey. Size: 14mm x 2.5m (9/16" x 8'2")

Connector clips: side-to-side (H: 14mm)



For joining sections of matting together side-to-side. Supplied in packs of 10