


# Flexi Ridge




Hard-wearing ribbed matting ideal for standing work areas, production lines and packing stations.

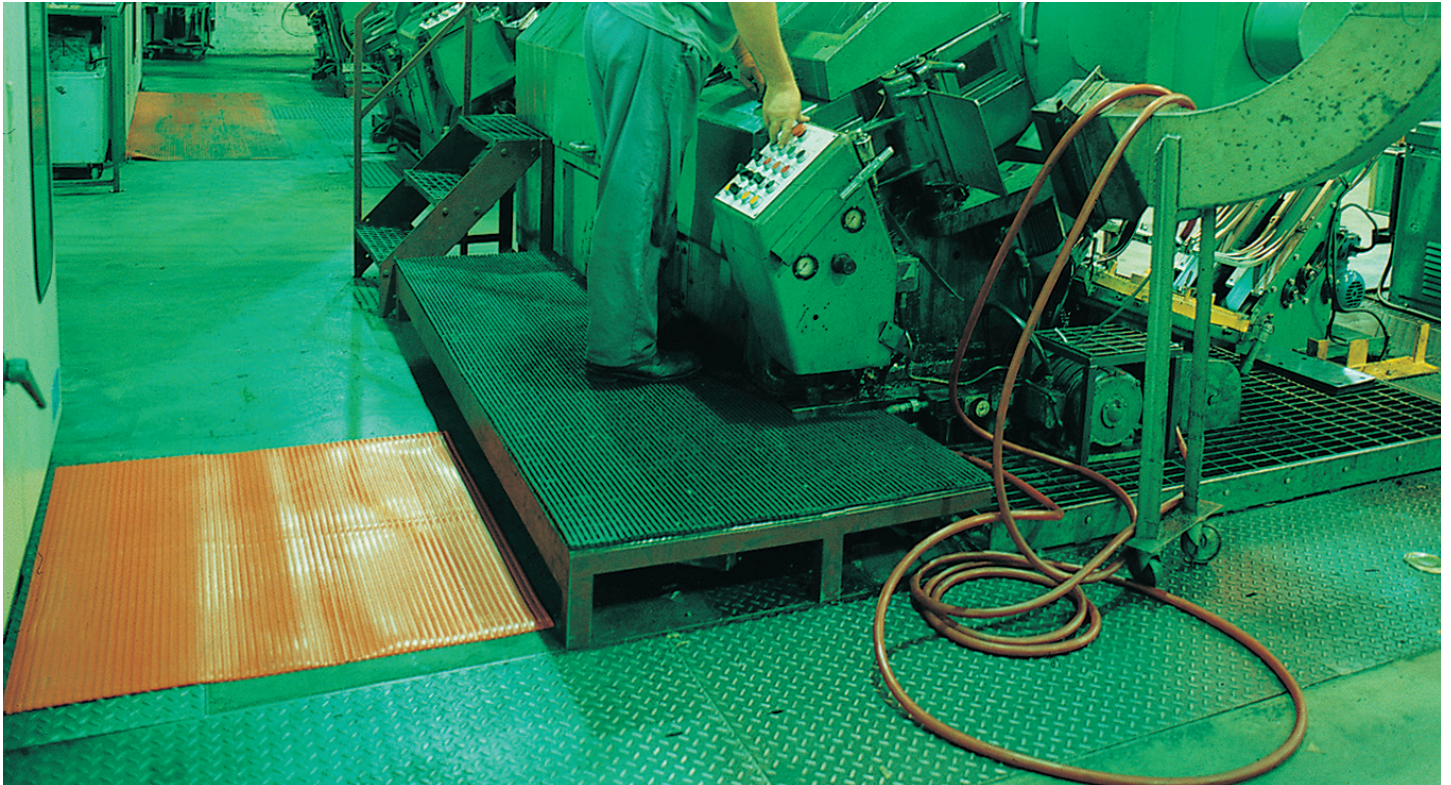

Flexi Ridge's ribbed surface withstands light spills, protects delicate items and provides cushioning underfoot, making it ideal for workplaces where employees are on their feet and tools are in frequent use.

This excellent multi-purpose product provides good slip resistance, reduces the impact of noise and protects delicate items and tools from damage if dropped. Thanks to the mat's ribbed surface, it's also easy to maintain – the integral ridges means any liquid is easily dispersed, and the smooth surface can be wiped down.



## Features:



Ribbed surface



High component and noise protection



Vinyl composition



Made from flexible PVC



Supplied in a convenient roll format



## Benefits:



Good slip and wear resistance



Reduces risk to tools and delicate items if dropped



Resistant to chemicals, acids and oils



Easy to cut to fit on site; contours to uneven surfaces



Quick to install



## Plastex Matting Inc.

120 55th St NE  
Fort Payne, AL 35967  
+1 256 845 7725

USA + UK manufactured matting products:  
[plastexmatting.com](http://plastexmatting.com)

### Standard sizes:

Product	Flexi Ridge
Height	2.8mm (7/16")
Standard roll options	2 x 1m (65'7" x 3'3")
Weight	2.45 kg/m <sup>2</sup> (0.50 lbs/sq.ft)

### Tolerances:

	Height (+/- 0.5mm)	Length (0+0.3m)	Width (+/- 1cm)
Flexi Ridge	2.8 mm	20 m	100 cm

All dimensions are nominal

### Technical information:

Chemical	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this <a href="#">information sheet</a> .
Composition	Flexible Polyvinyl Chloride (PVC)
Environment	Flexi Ridge is 100% recyclable. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Fire	EN 13501-1: 2007-Bfl-S1
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by <a href="#">downloading this information sheet</a> .
Thermal	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
UV light	Resistant to PVC degradation.
Warranty	One year. Visit our <a href="#">policies page</a> for more information about warranties

### Installation:

Flexi Ridge's one-piece construction means installation is simple:


- Supplied in convenient roll format
- Easy to cut to size and shape
- Contours to uneven surfaces

### Cleaning:

Keeping Flexi Ridge looking good is easy:

- Light to handle
- Simply lift or roll to clean
- Easy to wipe clean

### Colours:



Dark grey



Green

More colours  
available  
upon request