


Cushioned animal cage matting that's hygienic, comfortable and easy to clean.



Create a warm and inviting environment for animals to lie and stand on with HVD, cushioned matting that provides both cleanliness and comfort.

Made from non-toxic, flexible PVC with a smooth upper surface, it ensures a comfortable and hygienic environment for all types of animals. The two-layer construction elevates the animal off the surface and the open grid provides a high level of drainage, making it ideal for veterinary clinics, kennels, research facilities and zoos.

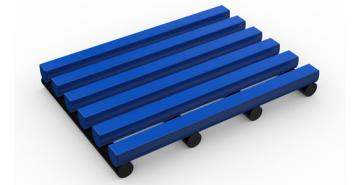

Features:



Extra smooth surface



Two layer construction



Made from non-toxic, inert PVC



Flexible construction



Supplied in 10m (33') rolls




Benefits:



Creates a comfortable environment



High level of drainage




Hygienic and easy to clean



Easy to cut to fit on site



Quick to install

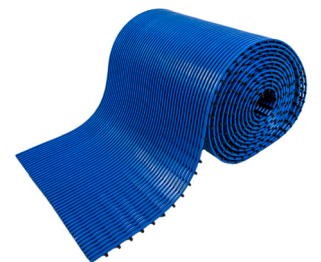

Plastic Extruders Ltd.

Russell Gardens, Wickford
Essex, SS11 8DN
+44 (0) 1268 571 116

UK + USA manufactured matting products:
plastexmatting.com



Standard sizes:

Product	HVD
Height	13.5mm (17/32")
Standard roll options	10 × 0.6m (33' × 2')
	10 × 0.91m (33' × 3')
	10 × 1.22m (33' × 4')
Weight	6.9kg/m ² (1.4lb/sq.ft)

Tolerances:

	Height (+/- 0.5mm)	Length (0+0.3m)	Width (+/- 1cm)
HVD	13.5 mm	10 m	60cm 91 cm 122 cm

All dimensions are nominal

Technical information:

Acoustic	Excellent sound absorption properties
Chemical	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this information sheet .
Composition	Flexible Polyvinyl Chloride (PVC)
Environment	HVD is 100% recyclable. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Hygiene	Made from non-porous PVC that's naturally resistant to bacteria growth.
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by downloading this information sheet .
Thermal	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
UV light	Resistant to PVC degradation
Warranty	Two years. Visit our policies page for more information about warranties

Installation:

HVD's one-piece construction means installation is simple:

- Supplied in 10m rolls
- Easy to cut to fit on site
- Contours to uneven surfaces

Cleaning:


Keeping HVD looking good is easy:

- Light to handle
- Simply roll or lift to clean
- No special cleaning tools needed

Colours:



Black




Blue

More colours
available
upon request

Ancillaries:


> HVD

PVC edging (H: 14mm,W: 60mm)



Supplied in rolls of 10.1m (33') length with cold welding paste. Comes in black, dark grey, dark brown, holly green, Oxford blue, yellow. Size: 14mm x 60mm x 10.1m (9/16" x 2 1/2" x 33').

PVC edging (H: 14mm,W: 100mm)




Supplied in rolls of 10.1m (33') length with cold welding paste. Comes in black, dark grey and yellow. Size: 14mm x 100mm x 10.1m (9/16" x 3 3/4" x 33')

Aluminium edging (H: 15mm)




Supplied in sections of 2m (6'6") length with fixing screws and plugs. Comes in anodised aluminium and powder coated yellow. Size: 15mm x 45mm x 2m (5/8" x 1 13/16" x 6'6")

PVC snap track (H: 14mm)




Two-part snap track that can be welded together to join rolls end-to-end or side-to-side to cover large areas. Supplied with cold welding paste. Comes in black and dark grey. Size: 14mm x 2.5m (9/16" x 8'2")

Large floor hooks (H: 14mm)




For securing sections of matting to the floor. Supplied in packs of 10 with screws and plugs

Small floor hook (H: 14mm)



For securing sections of matting to the floor. Supplied in packs of 20 with screws and plugs

Connector clips: dual purpose (H: 14mm)



For joining sections of matting together side-to-side or end-to-end. Supplied in packs of 10